
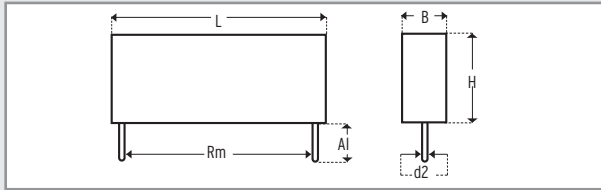


# Kondensatoren

## Folienkondensator MKT (R)

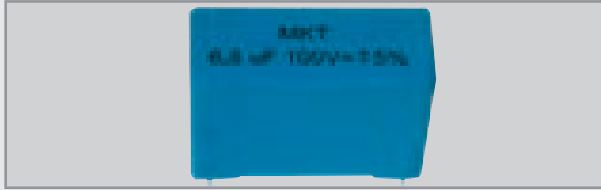


Folienkondensator mit Polyesterfolie  
 Anschlüsse: Kupferdraht, verzinkt  
 Kapazitätsbereich: von 0,01  $\mu\text{F}$  bis 33,0  $\mu\text{F}$   
 Nennspannung: 100 V  
 C-Toleranz:  $\pm 5\%$   
 Verlustfaktor  $\tan \delta$ :  $< 0,005$  bei 1 kHz  
 d2: 0,8 mm

### MKTR • 100 Volt

| Bezeichnung  | C/ $\mu\text{F}$ | L/mm | B/mm | H/mm | Rm/mm |
|--------------|------------------|------|------|------|-------|
| MKTR/001/100 | 0,01             | 10,0 | 4,00 | 10,0 | 10,0  |
| MKTR/010/100 | 0,10             | 18,0 | 5,00 | 11,0 | 10,0  |
| MKTR/022/100 | 0,22             | 18,0 | 5,00 | 11,0 | 10,0  |
| MKTR/033/100 | 0,33             | 18,0 | 5,00 | 11,0 | 15,0  |
| MKTR/047/100 | 0,47             | 18,0 | 5,00 | 11,0 | 15,0  |
| MKTR/068/100 | 0,68             | 18,0 | 5,00 | 11,0 | 15,0  |
| MKTR/1,0/100 | 1,00             | 18,0 | 5,00 | 11,0 | 15,0  |
| MKTR/1,5/100 | 1,50             | 26,5 | 6,00 | 15,0 | 15,0  |
| MKTR/2,2/100 | 2,20             | 26,5 | 6,00 | 15,0 | 22,5  |
| MKTR/2,7/100 | 2,70             | 26,5 | 6,00 | 15,0 | 22,5  |
| MKTR/3,3/100 | 3,30             | 26,5 | 7,00 | 16,0 | 22,5  |
| MKTR/3,9/100 | 3,90             | 26,5 | 8,50 | 17,0 | 22,5  |
| MKTR/4,7/100 | 4,70             | 32,0 | 9,00 | 17,0 | 27,5  |
| MKTR/5,6/100 | 5,60             | 32,0 | 9,00 | 17,0 | 27,5  |
| MKTR/6,8/100 | 6,80             | 32,0 | 9,00 | 17,0 | 27,5  |
| MKTR/8,2/100 | 8,20             | 32,0 | 11,0 | 20,0 | 27,5  |
| MKTR/10/100  | 10,0             | 32,0 | 11,0 | 20,0 | 27,5  |
| MKTR/15/100  | 15,0             | 32,0 | 13,0 | 22,0 | 27,5  |
| MKTR/22/100  | 22,0             | 32,0 | 15,0 | 24,0 | 27,5  |
| MKTR/33/100  | 33,0             | 42,5 | 22,0 | 30,0 | 37,5  |

Rm/mm = Rastermaß in mm

## Folienkondensator MKP (R)

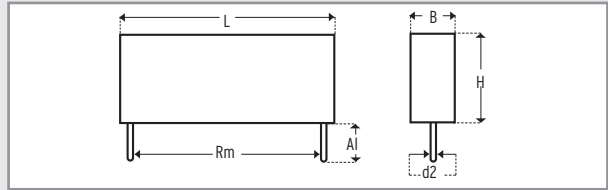

Folienkondensator mit Polypropylenfolie  
 Anschlüsse: Kupferdraht verzinkt  
 Kapazitätsbereich: von 1,0  $\mu\text{F}$  bis 47,0  $\mu\text{F}$   
 Nennspannung: 250 V  
 C Toleranz:  $\pm 5\%$   
 Verlustfaktor:  $\tan \delta$ :  $< 0,0020$  bei 1 kHz

### MKP radial 250 Volt

| Bezeichnung  | C/ $\mu\text{F}$ | L/mm | B/mm | H/mm | Rm/mm |
|--------------|------------------|------|------|------|-------|
| MKPR/1,0/250 | 1,0              | 43   | 10   | 30   | 37,5  |
| MKPR/1,5/250 | 1,5              | 43   | 10   | 20   | 37,5  |
| MKPR/2,2/250 | 2,2              | 43   | 10   | 20   | 37,5  |
| MKPR/2,7/250 | 2,7              | 43   | 11   | 22   | 37,5  |
| MKPR/3,3/250 | 3,3              | 43   | 14   | 25   | 37,5  |
| MKPR/3,9/250 | 3,9              | 43   | 16   | 29   | 37,5  |
| MKPR/4,7/250 | 4,7              | 43   | 17   | 28   | 37,5  |
| MKPR/5,6/250 | 5,6              | 43   | 22   | 30   | 37,5  |
| MKPR/6,8/250 | 6,8              | 43   | 22   | 30   | 37,5  |
| MKPR/8,2/250 | 8,2              | 43   | 28   | 37   | 37,5  |
| MKPR /10/250 | 10,0             | 43   | 28   | 37   | 37,5  |
| MKPR /12/250 | 12,0             | 43   | 28   | 37   | 37,5  |
| MKPR /15/250 | 15,0             | 43   | 35   | 45   | 37,5  |
| MKPR /22/250 | 22,0             | 43   | 40   | 50   | 37,5  |
| MKPR /33/250 | 33,0             | 59   | 40   | 50   | 52,5  |
| MKPR /47/250 | 47,0             | 59   | 40   | 50   | 52,5  |