

### KEY FEATURES

- Very high efficiency (3%)
- Extremely linear frequency response
- Low harmonic distortion
- 3" edgewound aluminum voice coil with polyimide fiber glass former
- Large magnetic assembly to provide efficient heat dissipation
- Designed for high quality mid-frequency reproduction

### TECHNICAL SPECIFICATIONS


Nominal diameter	250 mm	10 in
Rated impedance		8 Ω
Minimum impedance		6,6 Ω
Power capacity*		350 W <sub>AES</sub>
Program power		700 W
Sensitivity	98 dB	1W @ 1m @ Z <sub>N</sub>
Frequency range		70 - 4.000 Hz
Recom. enclosure vol.	20 / 50 l	0,7 / 1,75 ft <sup>3</sup>
Voice coil diameter	77 mm	3 in
BI factor		18,7 N/A
Moving mass		0,038 kg
Voice coil length		13,5 mm
Air gap height		10 mm
X <sub>damage</sub> (peak to peak)		24 mm

### THIELE-SMALL PARAMETERS\*\*

Resonant frequency, f <sub>s</sub>	50 Hz
D.C. Voice coil resistance, R <sub>e</sub>	6,3 Ω
Mechanical Quality Factor, Q <sub>ms</sub>	6,6
Electrical Quality Factor, Q <sub>es</sub>	0,22
Total Quality Factor, Q <sub>ts</sub>	0,21
Equivalent Air Volume to C <sub>ms</sub> , V <sub>as</sub>	54 l
Mechanical Compliance, C <sub>ms</sub>	266 μm / N
Mechanical Resistance, R <sub>ms</sub>	1,8 kg / s
Efficiency, η <sub>0</sub>	3 %
Effective Surface Area, S <sub>d</sub>	0,038 m <sup>2</sup>
Maximum Displacement, X <sub>max</sub> ***	4,5 mm
Displacement Volume, V <sub>d</sub>	170 cm <sup>3</sup>
Voice Coil Inductance, L <sub>e</sub> @ 1 kHz	0,9 mH



### DIMENSION DRAWINGS

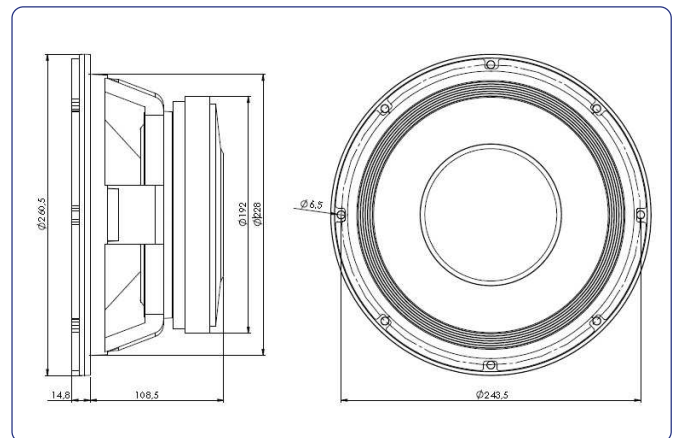

### MOUNTING INFORMATION

Overall diameter	260,5 mm	10,25 in
Bolt circle diameter	243,5 mm	9,58 in
Baffle cutout diameter:		
- Front mount	228 mm	9 in
- Rear mount	230 mm	9,05 in
Depth	120 mm	4,72 in
Volume displaced by driver	3 l	0,10 ft <sup>3</sup>
Net weight	7,1 kg	15,6 lb
Shipping weight	7,5 kg	16,5 lb


#### Notes:

\* The power capacity is determined according to AES2-1984 (r2003) standard. Program power is defined as the transducer's ability to handle normal music program material.


\*\* T-S parameters are measured after an exercise period using a preconditioning power test. The measurements are carried out with a velocity-current laser transducer and will reflect the long term parameters (once the loudspeaker has been working for a short period of time).

\*\*\* The X<sub>max</sub> is calculated as (L<sub>vc</sub> - H<sub>ag</sub>)/2 + (H<sub>ag</sub>/3,5), where L<sub>vc</sub> is the voice coil length and H<sub>ag</sub> is the air gap height.

### FREE AIR IMPEDANCE CURVE

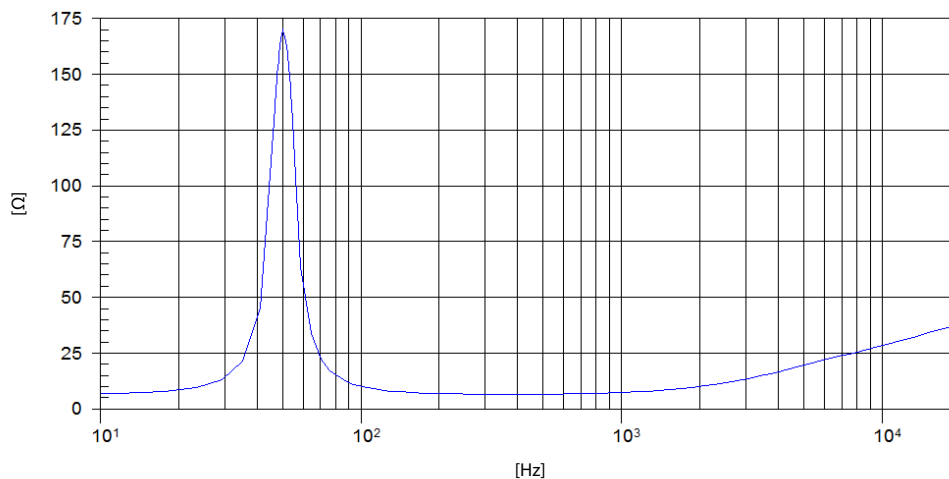

### FREQUENCY RESPONSE AND DISTORTION

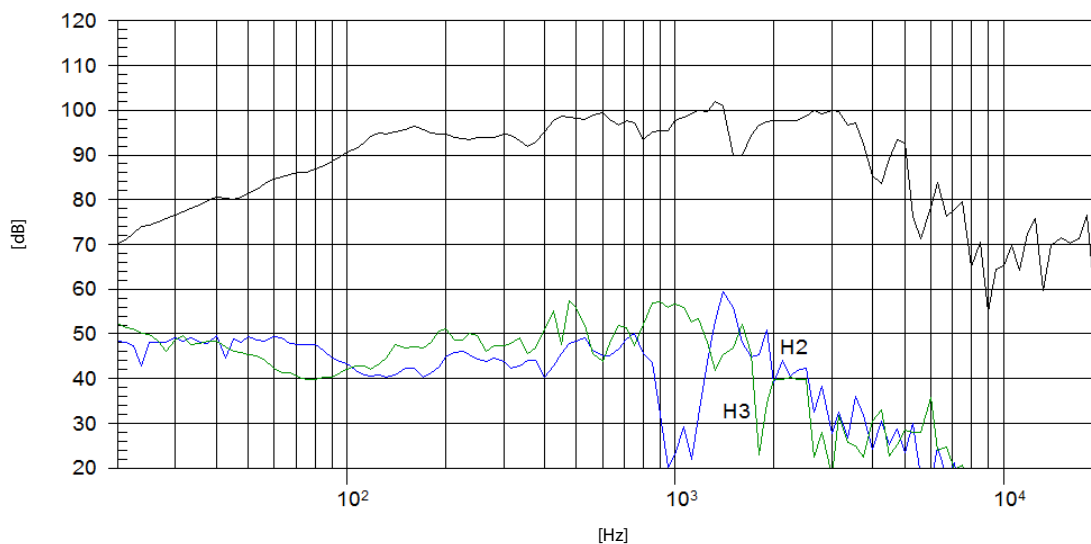

**Note:** On axis frequency response measured with loudspeaker standing on infinite baffle in anechoic chamber, 1W @ 1m